

# TR350 - TR450

## PNEUMATIC

### STANDARD EQUIPMENT


- Pneumatic operation of saw assembly.
- Motor brake.
- Two-handed control for operator safety.
- CE electrical system.
- Adjustable blade ascent speed.
- Safety grill in the cutting zone.
- Widia blade.
- 1m work surface to the right of the blade.
- 1m work surface to the left of the blade.



TR450



TR350

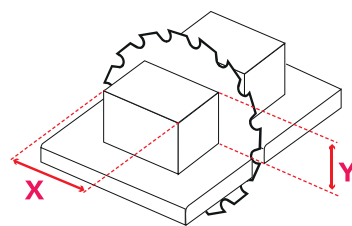

#### TR350

X	Y
210 mm	30 mm
200 mm	50 mm
150 mm	80 mm

#### TR450

X	Y
330 mm	25 mm
300 mm	50 mm
250 mm	95 mm

TECHNICAL CHARACTERISTICS		TR350	TR450
Item code		ZM027	ZM028
Three-phase motor	HP	4	5.5
Three-phase motor	kW	3	4
Motor revs	RPM	3000	3000
Blade diameter	mm.	350	450
Motor arbor	mm.	30	30
Maximum operating pressure	bar	8	8
Net weight	Kg.	160	340