

TR501

PNEUMATIC

STANDARD EQUIPMENT

- Pneumatic operation of saw assembly.
- Motor brake.
- Two-handed control for operator safety.
- CE electrical system.
- Adjustable blade ascent speed.
- Widia blade.
- 1m work surface to the right of the blade.
- 1m work surface to the left of the blade.




TR501
(ZM365)



TR501/P
(ZM365 + ZA315)



TR501/G
(ZM365 + ZA329)

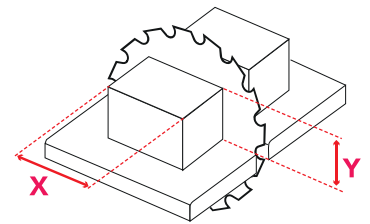

X	Y
360 mm	55 mm
350 mm	65 mm
340 mm	80 mm
325 mm	95 mm
310 mm	115 mm
295 mm	125 mm
280 mm	135 mm

TECHNICAL CHARACTERISTICS		TR501 - TR501/P	TR501/G
Item code		ZM365	ZM365
Three-phase motor	HP	10	10
Three-phase motor	kW	7,5	7,5
Motor revs	RPM	3000	3000
Blade diameter	mm.	500	500
Motor arbor	mm.	30	30
Maximum operating pressure	bar	8	8
Material loading		from front and side	from the side only
Net weight	Kg.	415	415