

TR600 - TR601

HYDRAULIC

STANDARD EQUIPMENT

- Hydraulic operation of saw assembly.
- Motor brake.
- Two-handed control for operator safety.
- CE electrical system.
- Adjustable blade ascent speed.
- Safety grill in the cutting zone (TR600 only).
- Widia blade.
- 1m work surface to the right of the blade.
- 1m work surface to the left of the blade.




TR601
(ZM364)



TR601/P
(ZM364 + ZA315)



TR600
(ZM030)

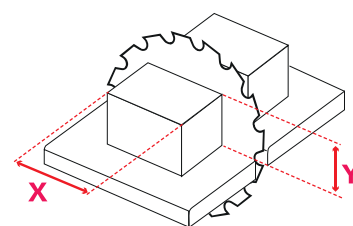

TR600

X	Y
610 mm	30 mm
580 mm	60 mm
530 mm	100 mm
490 mm	120 mm
450 mm	140 mm
380 mm	160 mm

TR601

X	Y
660 mm	30 mm
640 mm	50 mm
600 mm	90 mm
550 mm	130 mm
460 mm	170 mm
300 mm	200 mm

TECHNICAL CHARACTERISTICS		TR600	TR601 -TR601/P
Item code		ZM030	ZM364
Three-phase motor	HP	12	12
Three-phase motor	kW	9.2	9.2
Motor revs	RPM	3000	2636
Blade diameter	mm.	600	600
Motor arbor	mm.	30	30
Maximum operating pressure	bar	70	70
Material loading		from the side only	from front and side
Net weight	Kg.	570	780