

RS92 - RS110 - RS130



INDUSTRIAL LINE

FEATURES

- Cast iron arm (RS130 in steel).
- Cast iron column and carriage.
- Interchangeable steel slide-ways.
- Carriage with 8 bearings.
- Extraordinary arm rigidity for maximum cutting precision.
- Total operator safety.
- Blade not included

STANDARD EQUIPMENT

- Motor protection switch with release coil.
- Mechanical motor brake.
- Spring-operated carriage return.
- Mechanical end-stop.
- Emergency push button.

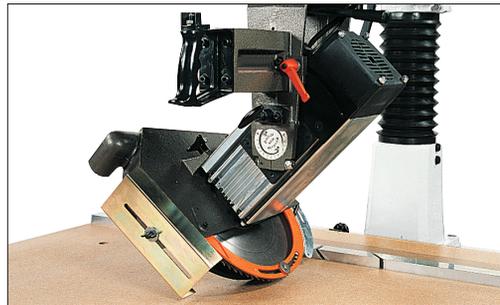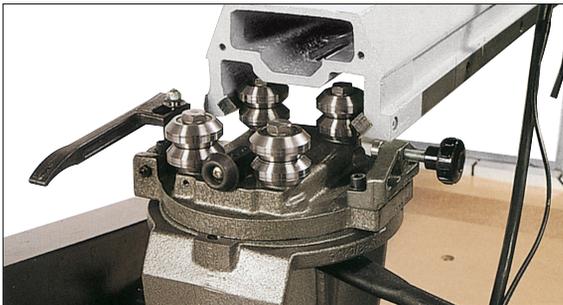

Carriage with 8 bearings with interchangeable slide-ways.

Motor assembly tilted by 45°.

TECHNICAL CHARACTERISTICS		RS92	RS110	RS130
Item code		ZM011	ZM012	ZM013
Three-phase motor	HP	6	6	6
Three-phase motor	kW	4.4	4.4	4.4
Motor revs	RPM	2800	2800	2800
Blade diameter	mm.	400	400	400
Motor arbor	mm.	30	30	30
Cross cutting capacity with 20 mm thickness	mm.	900	1080	1250
Cross-cut capacity at 45°	mm.	650	780	890
Cutting depth with blade diam. 400 mm	mm.	120	120	120
Cutting depth with blade diam. 500 mm	mm.	170	170	170
Depth of cut with motor at 45°	mm.	83	83	83
Miter locating stops		0 +45° -45°		
Bevel locating stops		0 -45°		
Carriage bearings	no.	8	8	8
Net weight	Kg.	500	520	600